
Product features




Undercounter dishwasher double skin 40x40 - 230 V							
Model	SAP Code	00011269					
		 Display type: ProScreen - 4 digit display + 2 LED bars Number of programs: 5 Number of skin: 2 Door clear height [mm]: 320 Rack size [mm]: 400 x 400 Water consumption of the washing cycle: 1,9 Washing cycle time [s]: 90-120-150 Detergent and rinse pump system: ProDose - accurate dosing with a peristaltic pump Wash pump type: two-way - DuoFlow Self-cleaning cycle: Yes Drain filter: ArchiMedes - double filtration with overflow discharge ensures only 18% loss of clean water to waste 					
SAP Code	00011269	Boiler power [kW]	2.600				
Net Width [mm]	466	Basin volume [l]	8				
Net Depth [mm]	556	Tank power [kW]	0.600				
Net Height [mm]	695	Water consumption of the washing cycle	1,9				
Net Weight [kg]	45.00	Washing cycle time [s]	90-120-150				
Power electric [kW]	3.500	Door clear height [mm]	320				
Loading	230 V / 1N - 50 Hz	Rack size [mm]	400 x 400				
Boiler capacity [l]	2.60	Noise of device	54,3				


Technical drawing









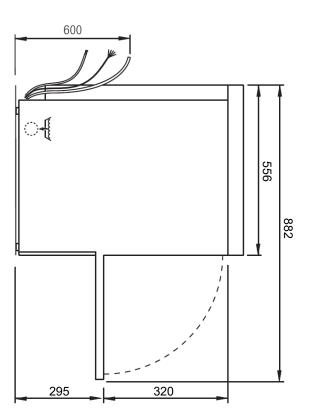

Product benefits



Undercounter dishwasher double skin 40x40 - 230 V **SAP Code** 00011269 Model Stainless steel outer shell construction **Fast heating** round construction with stainless steel, rounded edges, Performance management allows the current running of the boiler and basins body Deep-drawn bathtub - easy cleaning, high hygiene standard, long quick first warm-up of the dishwasher service life smooth operation Washing arms with a component, common for **Protection of fragile dishes** washing and rinsing softstart system for gradual start of washing programs to upper and lower composite swivel arms common protect fragile dishes for washing and rinsing with clickclack system for protects stemmed glasses and other fragile utensils easy removal easy and safe handling during cleaning; higher **Double shell construction** user comfort 10 stainless steel construction with insulated double jacket - quiet operation **LED Display** energy saving proScreen 4 local display + 2 LED strips - easy control of the dishwasher operation **Energy saving** 1 - continuous information on the status of energy saving energy saving system due to lowering the the wash cycle temperature of the boiler - diagnostics in the event of a fault cost saving **Double pump Fast heating** 12 unique two-way DuoFlow pump performance management allows the current running of - distributes the water pressure evenly between the the boiler and basins body upper and lower arms; no noise; allows the use of quick fault finding a weaker pump - transfer of original recipes Molded basket supports - keeping software up to date guide rails for the baskets molded from the body of the dishwasher high hygiene standard - longer service life **Detergent dispensers** two detergent and rinse aid dispensers - precise chemical dosing by ProDose - precise dosing system for detergent and rinse aid by peristaltic pump setting of values via control panel **Double filter system** the chamber filter and the waste filter together with the ArchiMedes system provide a discharge system with increased water purification efficiency - higher washing efficiency; longer life of the

washing bath

Technical parameters



Undercounter dishwasher double skin 40x40 - 230 V					
Model	SAP Code	00011269			
1. SAP Code:		15. Number of programs:			
00011269		5			
2. Net Width [mm]: 466		16. Opening of device: Tilting down			
3. Net Depth [mm]: 556		17. Door clear height [mm]: 320			
4. Net Height [mm]: 695		18. Inlet pressure: 2-4bar			
5. Net Weight [kg]: 45.00		19. Adjustable feet: Yes			
6. Gross Width [mm]: 516		20. Number of skin:			
7. Gross depth [mm]: 606		21. Self-cleaning cycle: Yes			
8. Gross Height [mm]: 745		22. Boiler capacity [l]: 2.60			
9. Gross Weight [kg]: 48.00		23. Boiler power [kW]: 2.600			
10. Device type: Electric unit		24. Basin volume [l]: 8			
11. Control type: Digital		25. Tank power [kW]: 0.600			
12. Material: Stainless steel		26. Number of arms for both rinsing and washing:			
13. Power electric [kW]: 3.500		27. Arm connection: Click-clack - easy removal with one hand			
14. Loading: 230 V / 1N - 50 Hz		28. Washing arm type: Rotatable two-pronged			

Technical parameters



Μ	Iodel SAP Code	00011269	
29.	Washing arm material: Composite	41. Heating system: HotWash - System of simultaneous operation of the heating element of the bath and the boiler, reducing the time for starting the next cycle	
0. Rinsing arm type: Rotating two-pronged		42. Hot water electric valve: Yes	
31.	Rinsing arm material: Composite	43. Closing door system: ProSoft - Reduces noise, dampens the door stop, which could cause damage to dishes	
32.	Deep drawn tank: Yes	44. Rack size [mm]: 400 × 400	
3.	Rack support: Pressed	45. Display type: ProScreen - 4 digit display + 2 LED bars	
34.	Tank surface strainers: composite	46. USB port: Yes, for Firmware actualisation	
35.	Drain filter: ArchiMedes - double filtration with overflow discharge ensures only 18% loss of clean water to waste	47. Self-diagnostics: Yes	
86.	Thermostop: Yes	48. Wash pump type: two-way - DuoFlow	
37.	Boiler thermostat adjust: Yes	49. Detergent dispenser: Yes	
88.	Rack feed capacity: 24-30-40	50. Rinse aid dispenser: Yes	
39 .	Detergent and rinse pump system: ProDose - accurate dosing with a peristaltic pump	51. Water consumption of the washing cycle: 1,9	
10.	Energy Saving system: EnergySaving - Energy saving system due to lowering the boiler temperature	52. Washing cycle time [s]: 90-120-150	

Technical parameters



Undercounter dishwasher double skin 40x40 - 230 V					
Model	SAP Code	00011269			
53. Rinse water temperature [°C]: 65		58. Program ProTemp: Yes			
54. Standard equipment for device: 1x glass basket, 1x plate basket, 1x cutlery basket		59. Program ProSelf: Yes			
55. Additional informatio The product comes with and 1x RM Rinse+ 10 kg (1x RM Clean+ 12 kg (00012271)	60. Program ProPlates: Yes			
56. Program ProSpeed: Yes		61. Noise of device: 54,3			
57. Program ProFessional	l:	-			

Yes