

# Technical data sheet



## Product features

Combi convection steam oven MINI electric 6x GN 2/3 automatic cleaning direct steam touch screen 5" 400 V

<b>Model</b>	<b>SAP Code</b>	00011962
--------------	-----------------	----------



- Steam type: Injection
- Number of GN / EN: 6
- GN / EN size in device: GN 2/3
- GN device depth: 40
- Control type: Touchscreen + buttons
- Display size: 5"
- Humidity control: MeteoSystem - regulation based on direct measurement of humidity in the chamber (patented)
- Advanced moisture adjustment: No
- Delta T heat preparation: Yes
- Automatic preheating: Yes
- Multi level cooking: Drawer program - control of heat treatment for each dish separately
- Door constitution: Vented safety double glass, removable for easy cleaning

<b>SAP Code</b>	00011962	<b>Steam type</b>	Injection
<b>Net Width [mm]</b>	519	<b>Number of GN / EN</b>	6
<b>Net Depth [mm]</b>	633	<b>GN / EN size in device</b>	GN 2/3
<b>Net Height [mm]</b>	770	<b>GN device depth</b>	40
<b>Net Weight [kg]</b>	96.00	<b>Control type</b>	Touchscreen + buttons
<b>Power electric [kW]</b>	4.700	<b>Display size</b>	5"
<b>Loading</b>	400 V / 3N - 50 Hz		

# Technical data sheet






Technical drawing

Combi convection steam oven MINI electric 6x GN 2/3 automatic cleaning direct steam touch screen 5" 400 V

Model

SAP Code

00011962

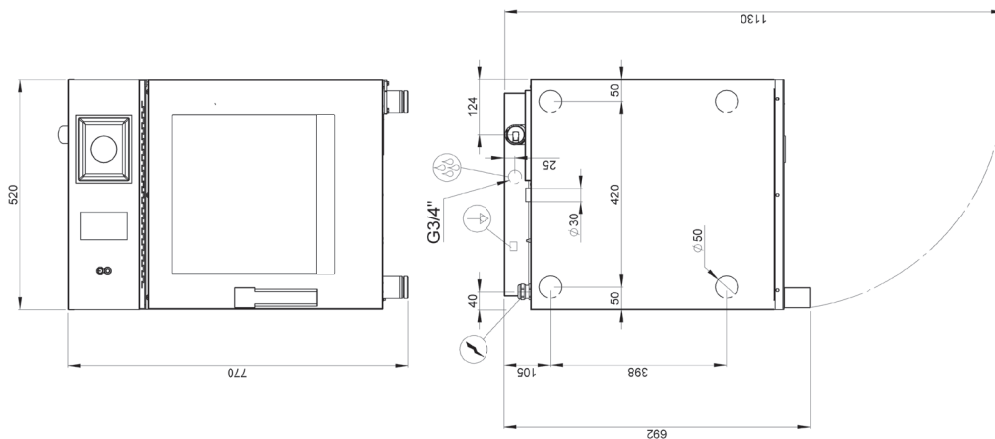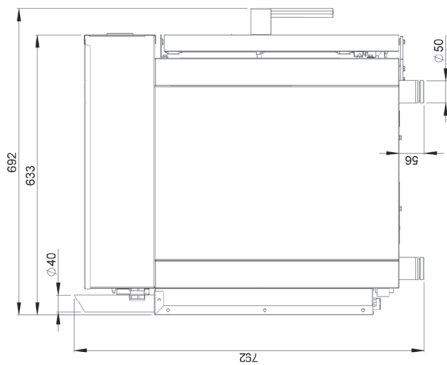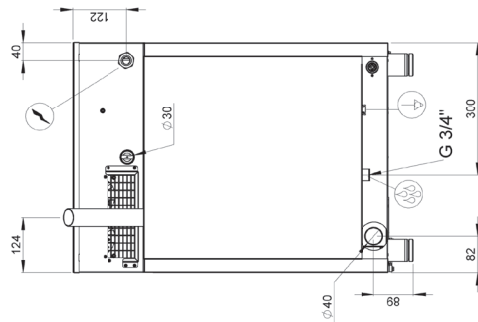

# Technical data sheet



## Product benefits

Combi convection steam oven MINI electric 6x GN 2/3 automatic cleaning direct steam touch screen 5'' 400 V

Model

SAP Code

00011962

1

### Double loading insert, longitudinal

inserts formed from rigid stainless steel wire allowing insertion of GN, double insertion, and the possibility of inserting divided GN

- the possibility of inserting more GNs in the case of shallow GNs and the possibility of cooking larger quantities of food, or more types of food

2

### Narrow body

economical construction with a panel placed on top of full-size GN 1/1 inserts

- full-featured kettle for small spaces

3

### Direct injection

steam generation by spraying water on the heating elements directly in the chamber

- simple and efficient solution
- moist steam with water droplets

4

### Touch screen display.

simple intuitive control with unique pictograms everything in Czech the possibility of using preset programs or manual control

- help with cooking even for less skilled cooks, safe baking even in the absence of an operator; create your own recipes; easy to use

5

### Weather system

patented device for measuring steam saturation in real time and in steam mode, the only one on the market

- precise information for the operator about the steam saturation in the cooking area

6

### Steam tuner

a control element that allows setting the exact saturation of steam in the cooking chamber during the cooking process

- possibility of cooking different types of cuisine, from very moist steam for typical Czech dishes to low-saturated steam for e.g. French cuisine

7

### A kit of two machines on top of each other

connection kit allowing two machines to be placed on top of each other connects the connections, inlets, wastes and ventilation of the lower combi oven

- allows the user to place two machines in smaller spaces to increase production; the chef can prepare two different dishes simultaneously

8

### Automatic washing

integrated chamber washing system the possibility of using liquid and tablet detergents option to use vinegar as a rinse aid the system also descales the micro boiler

- the chamber of the conveyer is washed without the presence of the operator, for example overnight; the system decalcifies the micro-boiler without the need for service intervention; the chamber is maintained in a constant 100% hygienic quality

9

### Six-speed fan, reversible with automatic calculation of direction change

in cooperation with the symbiotic system, it ensures perfect distribution of steam without losing its saturation its operation is controlled by the program or manually

- allows the preparation of a variety of dishes from the most delicate to high temperature baking at the highest speed

10

### External temperature probe

temperature probe located outside the cooking area choice of single or multipoint probe or vacuum probe

- positioning outside the cooking chamber extends its life; ensuring total food hygiene safety; HACCP record; control of heat treatment in the absence of the cook

11

### Longitudinal insertion to GN

penetration placed on the depth of the machine exchangeable for 600x400 sheet metal inserts

- possibility of inserting the whole range of GNs, not just the 1/1 size, possibility of using 6x3 baking trays

# Technical data sheet



## Technical parameters

Combi convection steam oven MINI electric 6x GN 2/3 automatic cleaning direct steam touch screen 5" 400 V

Model

SAP Code

00011962

**1. SAP Code:**

00011962

**2. Net Width [mm]:**

519

**3. Net Depth [mm]:**

633

**4. Net Height [mm]:**

770

**5. Net Weight [kg]:**

96.00

**6. Gross Width [mm]:**

580

**7. Gross depth [mm]:**

920

**8. Gross Height [mm]:**

980

**9. Gross Weight [kg]:**

106.00

**10. Device type:**

Electric unit

**11. Power electric [kW]:**

4.700

**12. Loading:**

400 V / 3N - 50 Hz

**13. Material:**

AISI 304

**14. Device color:**

Stainless steel

**15. Adjustable feet:**

Yes

**16. Humidity control:**

MeteoSystem - regulation based on direct measurement of humidity in the chamber (patented)

**17. Stacking availability:**

Yes

**18. Control type:**

Touchscreen + buttons

**19. Additional information:**

possibility of reverse door opening - handle on the right side (must be specified when ordering)

**20. Steam type:**

Injection

**21. Sturdier version:**

No

**22. Chimney for moisture extraction:**

Yes

**23. Delayed start:**

Yes

**24. Display size:**

5"

**25. Delta T heat preparation:**

Yes

**26. Automatic preheating:**

Yes

# Technical data sheet



## Technical parameters

Combi convection steam oven MINI electric 6x GN 2/3 automatic cleaning direct steam touch screen 5'´ 400 V

Model

SAP Code

00011962

**27. Automatic cooling:**

Yes

**28. Unified finishing of meals EasyService:**

Yes

**29. Night cooking:**

Yes

**30. Washing system:**

Open

**31. Detergent type:**

Liquid washing detergent + water rinse

**32. Multi level cooking:**

Drawer program - control of heat treatment for each dish separately

**33. Advanced moisture adjustment:**

No

**34. Slow cooking:**

from 50 °C

**35. Fan stop:**

Interruption when door is opened, not braked

**36. Lighting type:**

LED lighting in the door, on one side

**37. Cavity material and shape:**

AISI 304, with rounded corners for easy cleaning

**38. Reversible fan:**

Yes

**39. Sustaince box:**

Yes

**40. Heating element material:**

Incoloy

**41. Probe:**

Optional

**42. Remote control:**

No

**43. Shower:**

Manual (optional)

**44. Distance between the layers [mm]:**

30

**45. Smoke-dry function:**

Yes

**46. Interior lighting:**

Yes

**47. Low temperature heat treatment:**

Yes

**48. Number of fans:**

1

**49. Number of fan speeds:**

3

**50. Number of programs:**

1000

**51. USB port:**

Yes, for uploading recipes and updating firmware

**52. Door constitution:**

Vented safety double glass, removable for easy cleaning

**53. Number of preset programs:**

100

**54. Number of recipe steps:**

9

# Technical data sheet



Technical parameters

Combi convection steam oven MINI electric 6x GN 2/3 automatic cleaning direct steam touch screen 5´´ 400 V

<b>Model</b>	<b>SAP Code</b>	00011962
--------------	-----------------	----------

**55. Minimum device temperature [°C]:**

50

**59. Number of GN / EN:**

6

**56. Maximum device temperature [°C]:**

300

**60. GN / EN size in device:**

GN 2/3

**57. Device heating type:**

Combination of steam and hot air

**61. GN device depth:**

40

**58. HACCP:**

Yes

**62. Food regeneration:**

Yes