



Undercounter dishwasher double skin softener 40x40 - 230 V

Model SAP Code 00011284



- Display type: ProScreen 4 digit display + 2 LED bars
- Number of programs: 6
- Number of skin: 2
- Door clear height [mm]: 320
- Rack size [mm]: 400 x 400
- Water consumption of the washing cycle: 1,9
- Washing cycle time [s]: 90-120-150
- Detergent and rinse pump system: ProDose accurate dosing with a peristaltic pump
- Wash pump type: two-way DuoFlow
- Self-cleaning cycle: Yes
- Drain filter: ArchiMedes double filtration with overflow discharge ensures only 18% loss of clean water to waste


SAP Code	00011284	Boiler power [kW]	2.600
Net Width [mm]	466	Basin volume [l]	8
Net Depth [mm]	556	Tank power [kW]	0.600
Net Height [mm]	695	Water consumption of the washing cycle	1,9
Net Weight [kg]	47.00	Washing cycle time [s]	90-120-150
Power electric [kW]	3.500	Door clear height [mm]	320
Loading	230 V / 1N - 50 Hz	Rack size [mm]	400 x 400
Boiler capacity [l]	2.60	Noise of device	54,3




Technical drawing

Undercounter dishwasher double skin softener 40x40 - 230 V

Model SAP Code 00011284



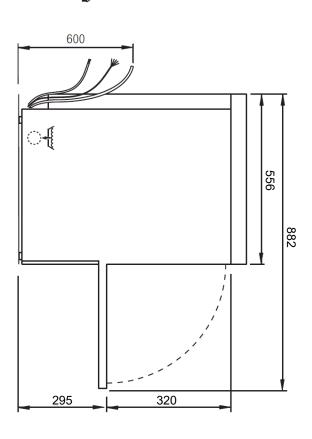





Undercounter dishwasher double skin softener 40x40 - 230 V

Model SAP Code 00011284

Stainless steel outer shell construction

round construction with stainless steel, rounded edges, Deep-drawn bathtub

- easy cleaning, high hygiene standard, long service life
- Washing arms with a component, common for washing and rinsing

upper and lower composite swivel arms common for washing and rinsing with clickclack system for easy removal

- easy and safe handling during cleaning; higher user comfort
- LED Display

proScreen 4 local display + 2 LED strips

- easy control of the dishwasher operation
- continuous information on the status of the wash cycle
- diagnostics in the event of a fault
- Double pump

unique two-way DuoFlow pump

- distributes the water pressure evenly between the upper and lower arms; no noise; allows the use of a weaker pump
- Molded basket supports

guide rails for the baskets molded from the body of the dishwasher

- high hygiene standard
- longer service life
- Detergent dispensers

Double filter system

two detergent and rinse aid dispensers

- precise chemical dosing by ProDose precise dosing system for detergent and rinse aid by peristaltic pump setting of values via control panel
- the chamber filter and the waste filter together with the ArchiMedes system provide a discharge system with increased water purification efficiency
 - higher washing efficiency; longer life of the washing bath

Energy saving

energy saving energy saving system due to lowering the temperature of the boiler

cost saving

Protection of fragile dishes

softstart system for gradual start of washing programs to protect fragile dishes

- protects stemmed glasses and other fragile utensils

Double shell constructionstainless steel construction with insulated double jacket

- quiet operation
- energy saving

Fast heating

performance management allows the current running of the boiler and basins body $% \left\{ \left\{ 1\right\} \right\} =\left\{ 1\right\} =\left\{ 1$

- quick first warm-up of the dishwasher
- smooth operation

tel.: +420 381 582 284 e-mail: rmgastro@rmgastro.com web: www.rmgastro.com



Technical parameters

Undercounter dishwasher double skin softener 40x40 - 230 V			
Model	SAP Code	00011284	
1. SAP Code: 00011284		15. Number of programs:	
2. Net Width [mm]: 466		16. Opening of device: Tilting down	
3. Net Depth [mm]: 556		17. Door clear height [mm]: 320	
4. Net Height [mm]: 695		18. Inlet pressure: 2-4bar	
5. Net Weight [kg]: 47.00		19. Adjustable feet: Yes	
6. Gross Width [mm]: 516		20. Number of skin:	
7. Gross depth [mm]: 606		21. Self-cleaning cycle: Yes	
8. Gross Height [mm]: 745		22. Boiler capacity [l]: 2.60	
9. Gross Weight [kg]: 50.00		23. Boiler power [kW]: 2.600	
10. Device type: Electric unit		24. Basin volume [l]:	
11. Control type: Digital		25. Tank power [kW]: 0.600	
12. Material: Stainless steel		26. Number of arms for both rinsing and washing:	
13. Power electric [kW]: 3.500		27. Arm connection: Click-clack - easy removal with one hand	

14. Loading:

230 V / 1N - 50 Hz

28. Washing arm type:

Rotatable two-pronged





Undercounter dishwasher double skin softener 40x40 - 230 V		
Model SAP Code	00011284	
29. Washing arm material: Composite	41. Heating system: HotWash - System of simultaneous operation of the heating element of the bath and the boiler, reducing the time for starting the next cycle	
30. Rinsing arm type: Rotating two-pronged	42. Hot water electric valve: Yes	
31. Rinsing arm material: Composite	43. Closing door system: ProSoft - Reduces noise, dampens the door stop, which could cause damage to dishes	
32. Deep drawn tank: Yes	44. Rack size [mm]: 400 × 400	
33. Rack support: Pressed	45. Built-in softener: Yes	
34. Tank surface strainers: composite	46. Display type: ProScreen - 4 digit display + 2 LED bars	
35. Drain filter: ArchiMedes - double filtration with overflow discharge ensures only 18% loss of clean water to waste	47. USB port: Yes, for Firmware actualisation	
36. Thermostop: Yes	48. Self-diagnostics: Yes	
37. Boiler thermostat adjust: Yes	49. Wash pump type: two-way - DuoFlow	
38. Rack feed capacity: 24-30-40	50. Detergent dispenser: Yes	
39. Detergent and rinse pump system:	51. Rinse aid dispenser:	

40. Energy Saving system:

boiler temperature

ProDose - accurate dosing with a peristaltic pump

EnergySaving - Energy saving system due to lowering the

1,9

52. Water consumption of the washing cycle:



Technical parameters

58. Program ProFessional:

Yes

Undercounter dishwasher double skin softener 40x40 - 230 V			
Model SAP Cod	e 00011284		
53. Washing cycle time [s]: 90-120-150	59. Program ProTemp: Yes		
54. Rinse water temperature [°C]: 65	60. Program ProClean: Yes		
55. Standard equipment for device: 1x glass basket, 1x plate basket, 1x cutlery bas	61. Program ProDrain: ket Yes		
56. Additional information: The product comes with 1x RM Clean+ 12 kg (0 and 1x RM Rinse+ 10 kg (00012273) for free	62. Program ProPlates: Yes		
57. Program ProSpeed: Yes	63. Noise of device: 54,3		

tel.: +420 381 582 284 e-mail: rmgastro@rmgastro.com web: www.rmgastro.com