



Undercounter dishwasher double skin with drain pump 40x40 - 230 V

Model SAP Code 00011285



- Display type: ProScreen 4 digit display + 2 LED bars
- Number of programs: 6
- Number of skin: 2
- Door clear height [mm]: 320
- Rack size [mm]: 400 x 400
- Water consumption of the washing cycle: 1,9
- Washing cycle time [s]: 90-120-150
- Detergent and rinse pump system: ProDose accurate dosing with a peristaltic pump
- Wash pump type: two-way DuoFlow
- Self-cleaning cycle: Yes
- Drain filter: ArchiMedes double filtration with overflow discharge ensures only 18% loss of clean water to waste


SAP Code	00011285	Boiler power [kW]	2.600
Net Width [mm]	466	Basin volume [l]	8
Net Depth [mm]	556	Tank power [kW]	0.600
Net Height [mm]	695	Water consumption of the washing cycle	1,9
Net Weight [kg]	46.00	Washing cycle time [s]	90-120-150
Power electric [kW]	3.500	Door clear height [mm]	320
Loading	230 V / 1N - 50 Hz	Rack size [mm]	400 x 400
Boiler capacity [ l ]	2.60	Noise of device	54,3



Technical drawing


Undercounter dishwasher double skin with drain pump 40x40 - 230 V

Model SAP Code



00011285



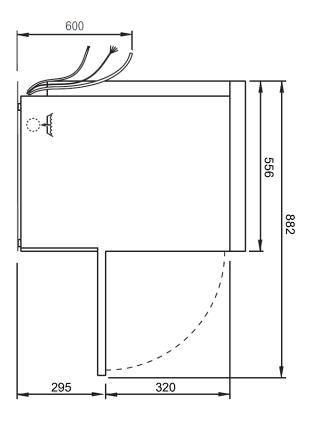

#### **Product benefits**



Undercounter dishwasher double skin with drain pump 40x40 - 230 V

Model SAP Code 00011285

#### Stainless steel outer shell construction

round construction with stainless steel, rounded edges, Deep-drawn bathtub

- easy cleaning, high hygiene standard, long service life
- Washing arms with a component, common for washing and rinsing

upper and lower composite swivel arms common for washing and rinsing with clickclack system for easy removal

- easy and safe handling during cleaning; higher user comfort
- LED Display

proScreen 4 local display + 2 LED strips

- easy control of the dishwasher operation
- continuous information on the status of the wash cycle
- diagnostics in the event of a fault
- Double pump

unique two-way DuoFlow pump

- distributes the water pressure evenly between the upper and lower arms; no noise; allows the use of a weaker pump
- Molded basket supports

guide rails for the baskets molded from the body of the dishwasher

- high hygiene standard
- longer service life
- Detergent dispensers

two detergent and rinse aid dispensers

- precise chemical dosing by ProDose precise dosing system for detergent and rinse aid by peristaltic pump setting of values via control panel
- The chamber filter and the waste filter together with the ArchiMedes system provide a discharge system with increased water purification efficiency
  - higher washing efficiency; longer life of the washing bath

#### Energy saving

energy saving energy saving system due to lowering the temperature of the boiler

cost saving

#### **Protection of fragile dishes**

softstart system for gradual start of washing programs to protect fragile dishes

- protects stemmed glasses and other fragile utensils

#### **Double shell construction**

stainless steel construction with insulated double jacket

- quiet operation
- energy saving

#### Fast heating

performance management allows the current running of the boiler and basins body

- quick first warm-up of the dishwasher
- smooth operation

tel.: +420 381 582 284 e-mail: rmgastro@rmgastro.com web: www.rmgastro.com

2024-05-10

3



Technical parameters

Undercounter dishwasher double skin with drain pump 40x40 - 230 V				
Model	SAP Code	00011285		
<b>1. SAP Code:</b> 00011285		<b>15. Number of programs:</b> 6		
<b>2. Net Width [mm]:</b> 466		<b>16. Opening of device:</b> Tilting down		
3. Net Depth [mm]: 556		17. Door clear height [mm]: 320		
4. Net Height [mm]: 695		18. Inlet pressure: 2-4bar		
<b>5. Net Weight [kg]:</b> 46.00		19. Adjustable feet: Yes		
<b>6. Gross Width [mm]:</b> 516		20. Number of skin:		
7. Gross depth [mm]: 606		21. Self-cleaning cycle: Yes		
8. Gross Height [mm]: 745		22. Boiler capacity [l]: 2.60		
9. Gross Weight [kg]: 49.00		<b>23. Boiler power [kW]:</b> 2.600		
10. Device type: Electric unit		24. Basin volume [l]:		
11. Control type: Digital		25. Tank power [kW]: 0.600		
12. Material: Stainless steel		26. Number of arms for both rinsing and washing:		
13. Power electric [kW]: 3.500		27. Arm connection: Click-clack - easy removal with one hand		

14. Loading:

230 V / 1N - 50 Hz

28. Washing arm type:

Rotatable two-pronged

Undercounter dishwasher double skin with drain pump 40x40 - 230 V





Model	SAP Code	00011285

29. Washing arm material:  Composite	<b>41. Heating system:</b> HotWash - System of simultaneous operation of the heating element of the bath and the boiler, reducing the time for starting the next cycle
30. Rinsing arm type: Rotating two-pronged	<b>42. Hot water electric valve:</b> Yes
31. Rinsing arm material:  Composite	<b>43. Closing door system:</b> ProSoft - Reduces noise, dampens the door stop, which could cause damage to dishes
<b>32. Deep drawn tank:</b> Yes	<b>44. Rack size [mm]:</b> 400 × 400
33. Rack support: Pressed	<b>45. Display type:</b> ProScreen - 4 digit display + 2 LED bars
<b>34. Tank surface strainers:</b> composite	<b>46. USB port:</b> Yes, for Firmware actualisation
<b>35. Drain filter:</b> ArchiMedes - double filtration with overflow discharge ensures only 18% loss of clean water to waste	<b>47. Drain pump:</b> Yes

36. Thermostop:		
Yes		

37. Boiler thermostat adjust:	
Yes	

39. D	etergent and rinse pump system:
Pr	oDose - accurate dosing with a peristaltic pump

40.	Energy Saving system:
	EnergySaving - Energy saving system due to lowering the
	boiler temperature

43.	<b>Closing door system:</b> ProSoft - Reduces noise, dampens the door stop, which could cause damage to dishes
44.	<b>Rack size [mm]:</b> 400 x 400
45.	<b>Display type:</b> ProScreen - 4 digit display + 2 LED bars
46.	<b>USB port:</b> Yes, for Firmware actualisation
47.	<b>Drain pump:</b> Yes
48.	Self-diagnostics: Yes
49.	Wash pump type: two-way - DuoFlow
50.	<b>Detergent dispenser:</b> Yes
51.	Rinse aid dispenser:



### Technical parameters

58. Program ProFessional:

Yes

Undercounter dishwasher double skin with drain pump 40x40 - 230 V				
Model SA	P Code	00011285		
E2 Washing evelotime [s]:		EQ Drogram DroTomn		
<b>53. Washing cycle time [s]:</b> 90-120-150		<b>59. Program ProTemp:</b> Yes		
<b>54. Rinse water temperature [°C]:</b> 65		<b>60. Program ProClean:</b> Yes		
<b>55. Standard equipment for device:</b> 1x glass basket, 1x plate basket, 1x cutle	ry basket	<b>61. Program ProDrain:</b> Yes		
<b>56. Additional information:</b> The product comes with 1x RM Clean+ 12 kg (00012271) and 1x RM Rinse+ 10 kg (00012273) for free		<b>62. Program ProPlates:</b> Yes		
<b>57. Program ProSpeed:</b> Yes		<b>63. Noise of device:</b> 54,3		

tel.: +420 381 582 284 e-mail: rmgastro@rmgastro.com web: www.rmgastro.com