

Product features

Undercounter dishwasher single skin 35x35 - 230 V

Model SAP Code 00011263




- Display type: 3 local display + diode bar
- Number of programs: 4
- Number of skin: 1
- Door clear height [mm]: 260
- Rack size [mm]: 350 x 350
- Water consumption of the washing cycle: 1,6
- Washing cycle time [s]: 60-120-150
- Detergent and rinse pump system: ProDose accurate dosing with a peristaltic pump
- Wash pump type: two-way DuoFlow
- Self-cleaning cycle: Yes
- Drain filter: ArchiMedes double filtration with overflow discharge ensures only 18% loss of clean water to waste


SAP Code	00011263	Boiler power [kW]	2.600
Net Width [mm]	401	Basin volume [l]	7
Net Depth [mm]	490	Tank power [kW]	0.600
Net Height [mm]	595	Water consumption of the washing cycle	1,6
Net Weight [kg]	27.00	Washing cycle time [s]	60-120-150
Power electric [kW]	3.500	Door clear height [mm]	260
Loading	230 V / 1N - 50 Hz	Rack size [mm]	350 x 350
Boiler capacity [l]	2.60	Noise of device	61



Technical drawing

Model SAP Code 00011263



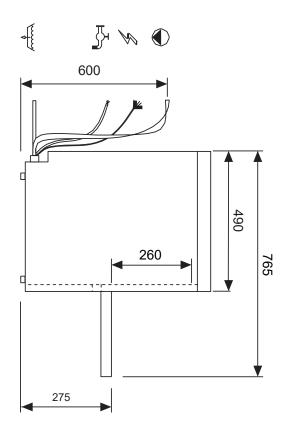



Product benefits

Undercounter dishwasher single skin 35x35 - 230 V

Model **SAP Code** 00011263

Stainless steel outer shell construction

round construction with stainless steel, rounded edges, partially pressed tub

- easy cleaning, high hygiene standard, long service life

Washing arms with a component, common for washing and rinsing

washing arms made of composite material common arm for washing and rinsing integrated screw secured against falling out

 easy and safe handling during cleaning; higher user comfort

LED Display

three-line display diode strip

- easy control of the dishwasher operation
- continuous information on the status of the wash cycle
- diagnostics in the event of a fault

Double pump

unique two-way DuoFlow pump

- distributes the water pressure evenly between the upper and lower arms; no noise; allows the use of a weaker pump

Molded basket supports

guide rails for the baskets molded from the body of the dishwasher

- high hygiene standard
- longer service life

Detergent dispensers

two detergent and rinse aid dispensers

 precise chemical dosing by ProDose - precise dosing system for detergent and rinse aid by peristaltic pump setting of values via control panel

Double filter system

the chamber filter and the waste filter together with the ArchiMedes system provide a discharge system with increased water purification efficiency

 higher washing efficiency; longer life of the washing bath

Energy saving

energy saving energy saving system due to lowering the temperature of the boiler

cost saving



Technical parameters

Undercounter dishwasher single s	kin 35x35 - 230 V	
Model	SAP Code	00011263
1. SAP Code: 00011263		15. Number of programs: 4
2. Net Width [mm]: 401		16. Opening of device: Tilting down
3. Net Depth [mm]: 490		17. Door clear height [mm]: 260
4. Net Height [mm]: 595		18. Inlet pressure: 2-4bar
5. Net Weight [kg]: 27.00		19. Adjustable feet: Yes
6. Gross Width [mm]: 451		20. Number of skin:
7. Gross depth [mm]: 540		21. Self-cleaning cycle: Yes
8. Gross Height [mm]: 645		22. Boiler capacity [l]: 2.60
9. Gross Weight [kg]: 30.00		23. Boiler power [kW]: 2.600
10. Device type: Electric unit		24. Basin volume [l]:
11. Control type: Digital		25. Tank power [kW]: 0.600
12. Material: AISI 304		26. Number of arms for both rinsing and washing:
13. Power electric [kW]: 3.500		27. Arm connection: Hand loosen/tighten screw

28. Washing arm type:

Rotatable two-pronged

14. Loading:

230 V / 1N - 50 Hz



Technical parameters

Undercounter dishwasher single skin 35x35 - 230 V	
Model SAP Code	00011263
29. Washing arm material: Composite	42. Display type: 3 local display + diode bar
30. Rinsing arm type: Rotating two-pronged	43. USB port: Yes, for Firmware actualisation
31. Rinsing arm material: Composite	44. Self-diagnostics: Yes
32. Rack support: Pressed	45. Wash pump type: two-way - DuoFlow
33. Tank surface strainers: composite	46. Detergent dispenser: Yes
34. Drain filter: ArchiMedes - double filtration with overflow discharge ensures only 18% loss of clean water to waste	47. Rinse aid dispenser: Yes
35. Thermostop: Yes	48. Water consumption of the washing cycle: 1,6
36. Boiler thermostat adjust: Yes	49. Washing cycle time [s]: 60-120-150
37. Rack feed capacity: 24-30-60	50. Rinse water temperature [°C]: 65
38. Detergent and rinse pump system: ProDose - accurate dosing with a peristaltic pump	51. Standard equipment for device: 2x glass basket, 1x cutlery basket
39. Energy Saving system: EnergySaving - Energy saving system due to lowering the boiler temperature	52. Program ProSpeed: Yes
40. Hot water electric valve: Yes	53. Program ProFessional: Yes
41. Rack size [mm]:	54. Program ProTemp:

350 x 350

Yes



Technical parameters

Undercounter dishwasher single skin 35x35 - 230 V				
Model	SAP Code	00011263		
55. Program ProClean: Yes		57. Noise of device: 61		
56. Program ProDrain: Yes				